

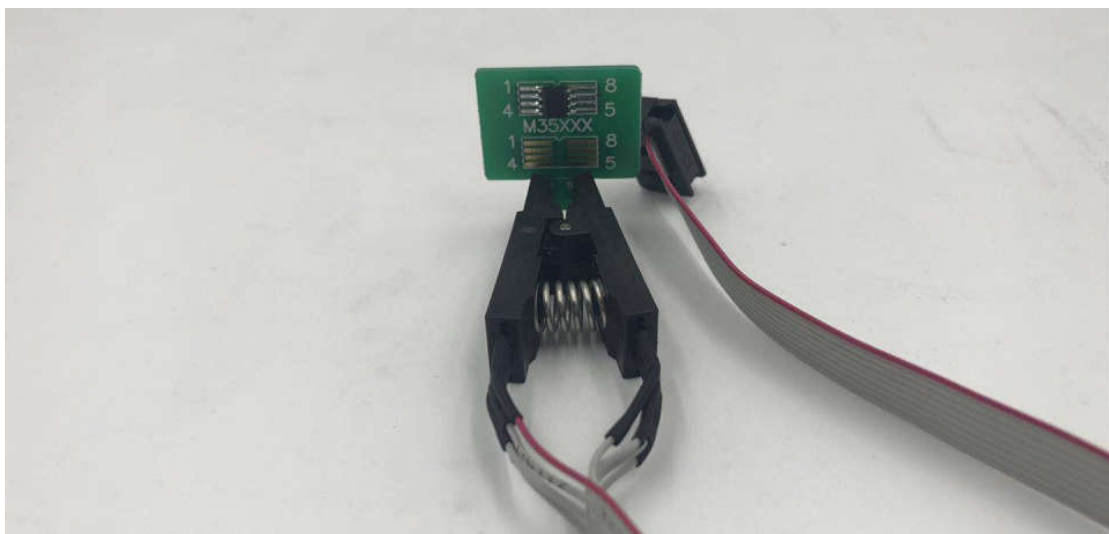
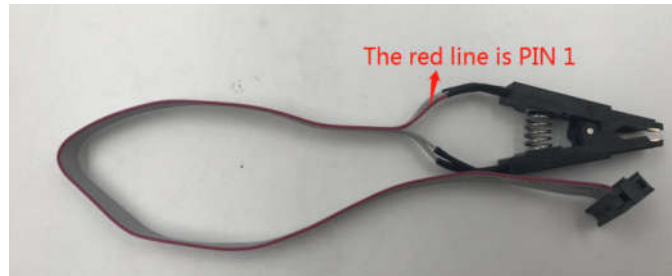


YH35XX Programmer + Simulator Instruction

1. Dismantle the original 35XX EEPROM from the odometer and solder it to the adaptor board. Then clamp the adaptor board with the solder-free clamp. Make sure the direction of the adaptor board and solder-free clamp is correct.

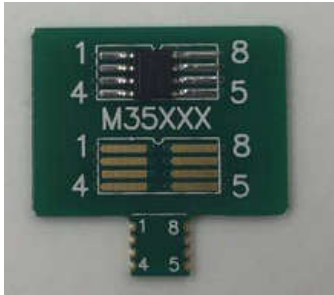

2. Plug the YH35XX programmer into the USB port of the PC, Click "computer" and it will recognize a usb flash drive named 35XX programmer.

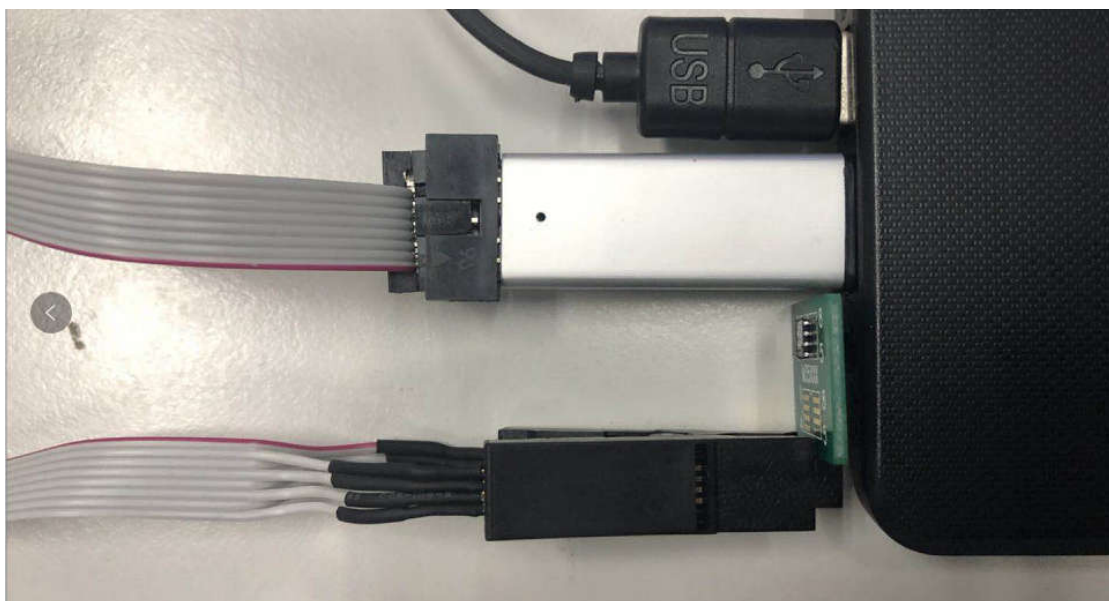





3. Click U disk 35XX programmer, Double-click "BMW_ODO_Standard_edition.exe" to open the software.

名称	修改日期	类型	大小
BMW_ODO.exe.config	2019-03-29 9:22	XML Configurati...	1 KB
BMW_ODO_Professional_edition.exe	2019-05-22 10:33	应用程序	105 KB
BMW_ODO_Standard_edition.exe	2019-05-15 9:07	应用程序	103 KB
使用说明(Instructions).txt	2019-05-22 10:41	TXT 文件	3 KB


4. Wait for the prompt: Programmer connection successful, Then run it.

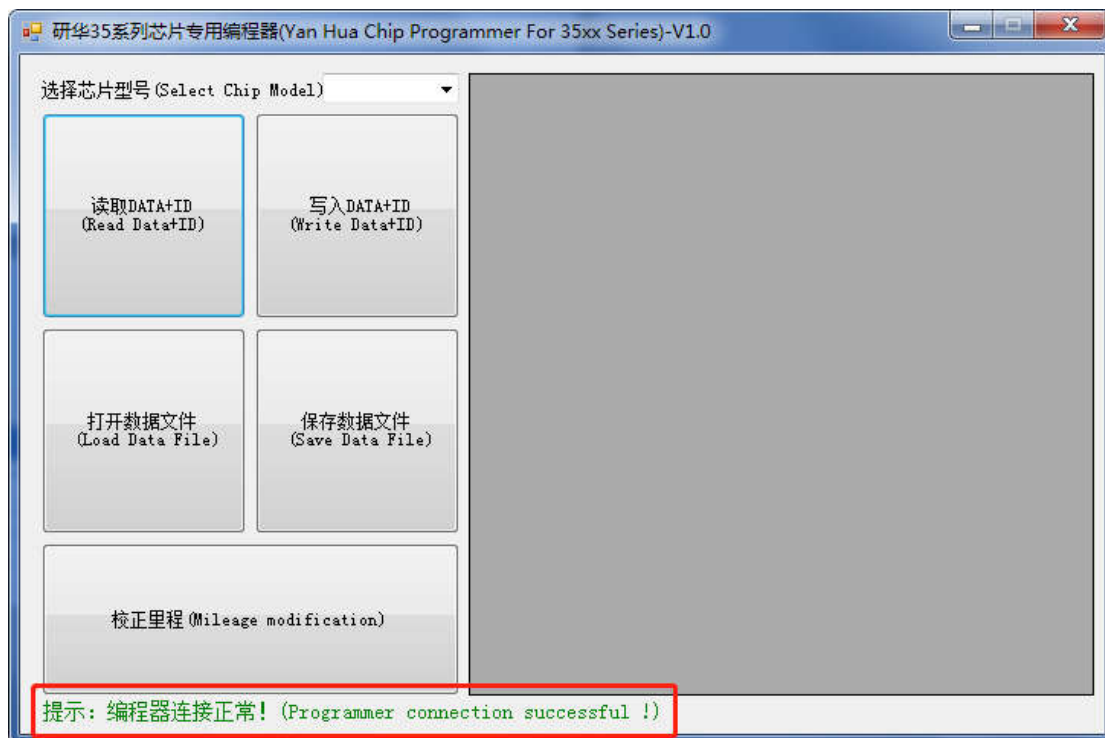



5. Select the EEPROM model and click "Read DATA+ID", check whether the read mileage is the same as the actual mileage.

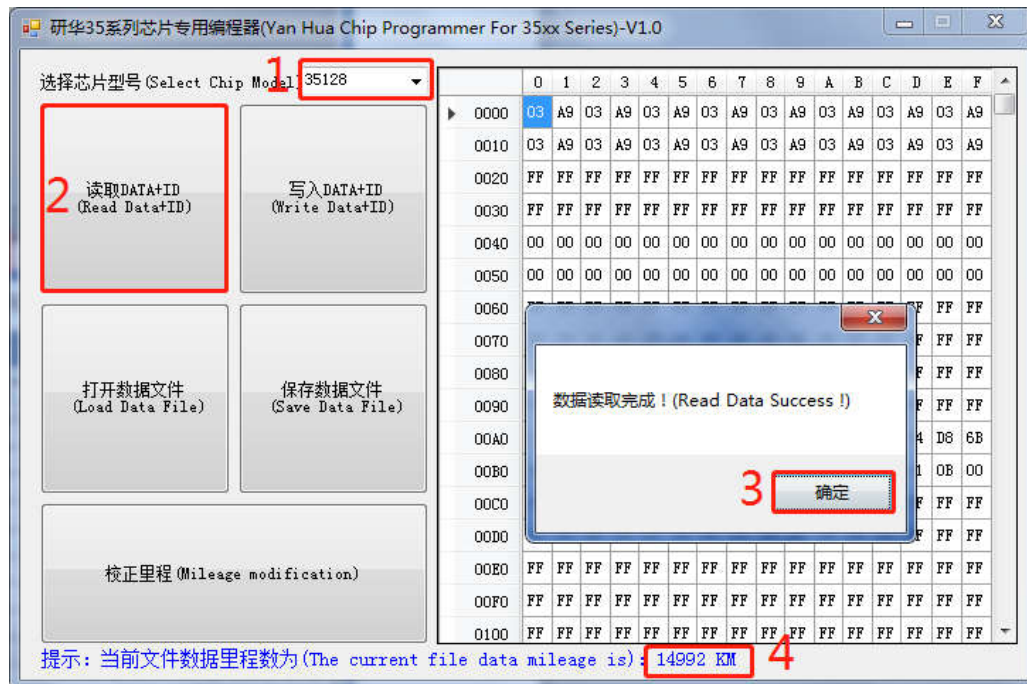

6. Click "Save Data File", Save the original data of original EEPROM to the folder.

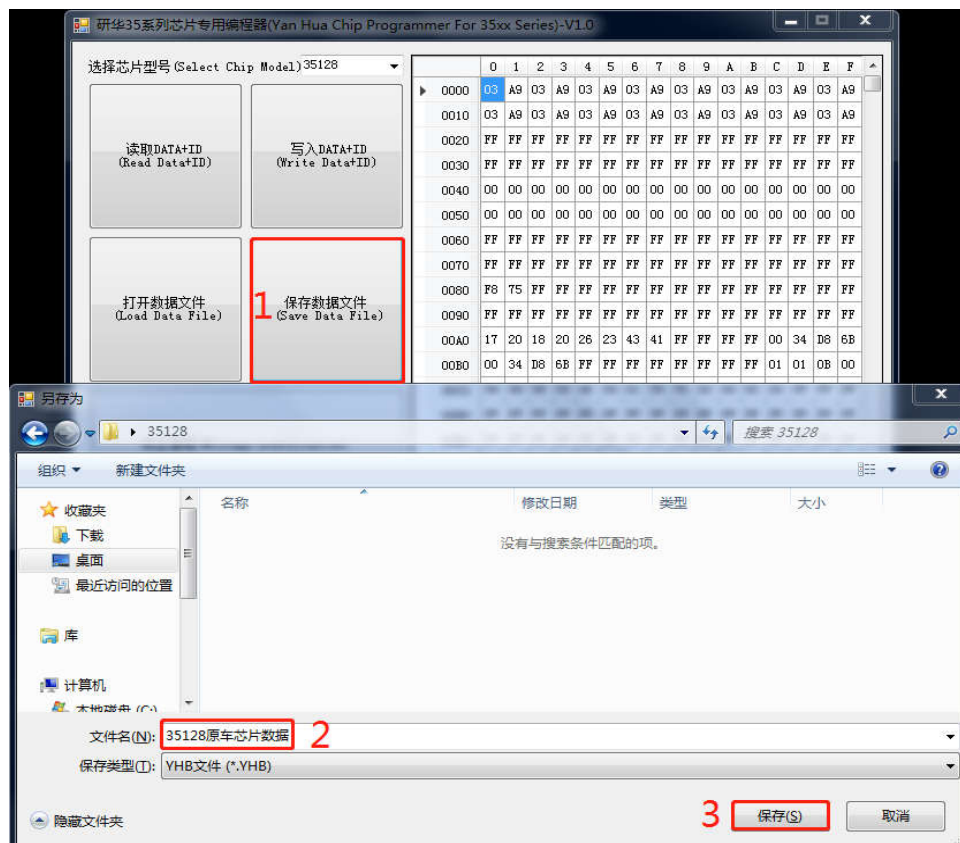

7. Hold the handle of the simulator, Clamp the Simulator with the solder-free clamp. Pay attention to the direction. Then connect the solder-free clamp to the programmer, connect the programmer to the PC.

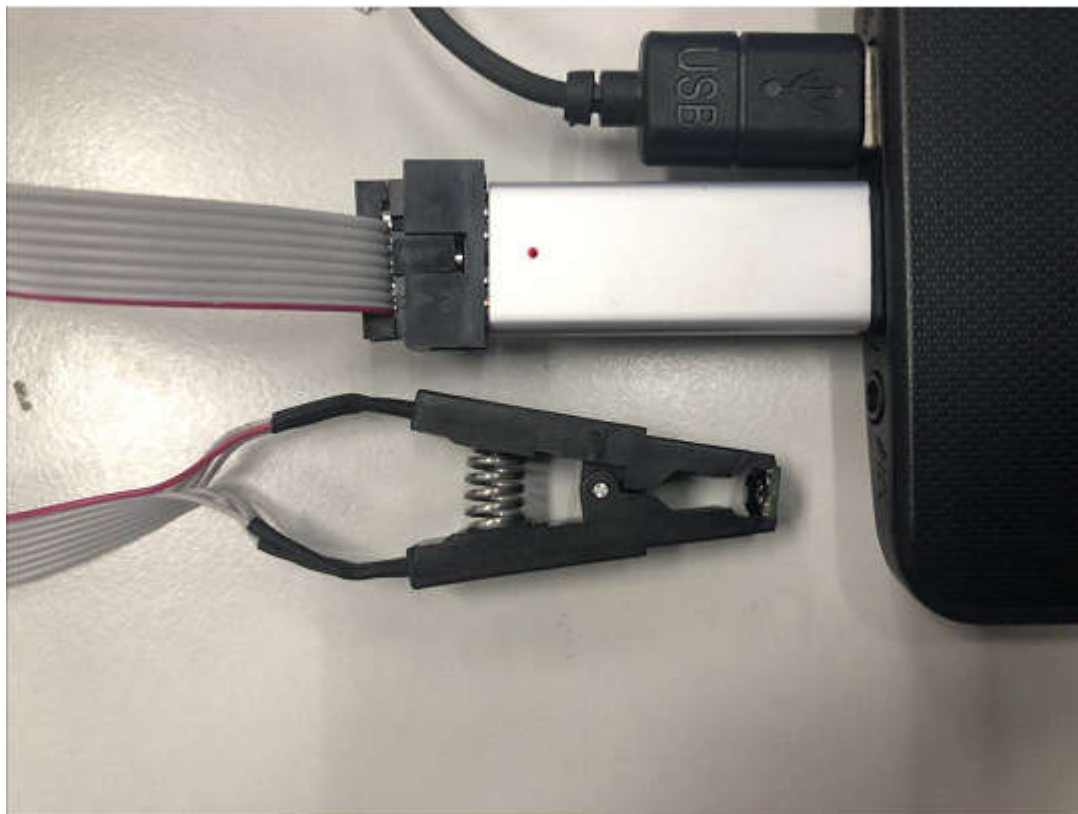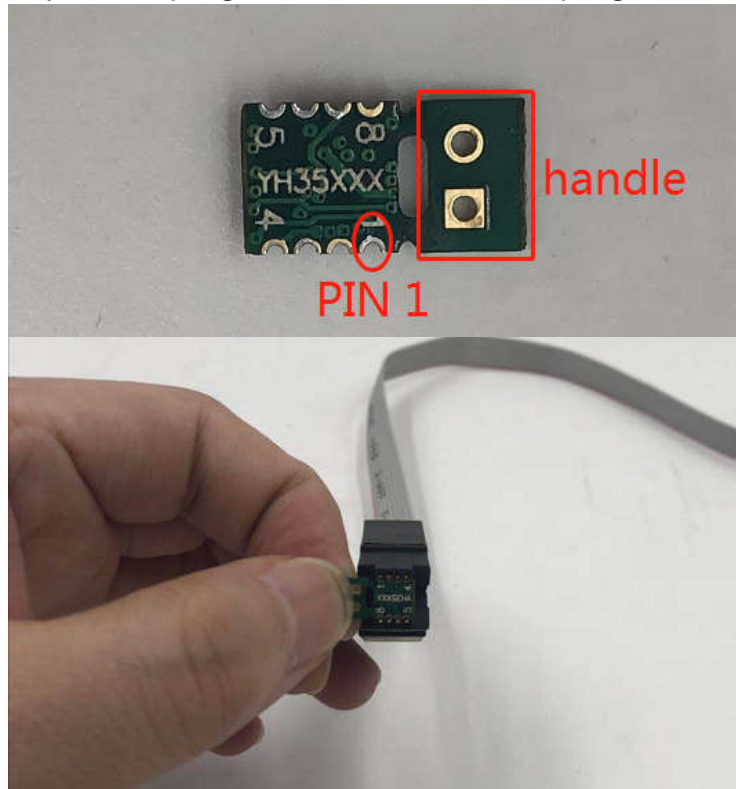


8. Select EEPROM model, click "Load Data File", Select the corresponding data of original EEPROM and load it. Check whether the displayed mileage is the same as the mileage displayed in odometer.

The screenshot shows the 'Yan Hua Chip Programmer For 35xx Series-V1.0' interface. In the first window, the 'Select Chip Model' dropdown is set to '35128' (marked with a red box and '1'). The 'Load Data File' button is highlighted with a red box and '2'. A file explorer window is open, showing the file '35128原车芯片数据.yhb' selected (marked with a red box and '3'). The 'Open' button in the file explorer is highlighted with a red box and '4'. The second window shows the software interface with the 'Load Data File' button highlighted with a blue box. Below the interface, a table displays the EEPROM data. The first row of data is highlighted in blue, showing the value '03' in the first column. At the bottom, a blue text box indicates the current file data mileage is 14992 KM, with '14992 KM' highlighted in a red box.


	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0000	03	A9	03	A9	03	A9	03	A9	03	A9	03	A9	03	A9	03	A9
0010	03	A9	03	A9	03	A9	03	A9	03	A9	03	A9	03	A9	03	A9
0020	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
0030	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
0040	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0050	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
0060	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
0070	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
0080	F8	75	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
0090	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
00A0	17	20	18	20	26	23	43	41	FF	FF	FF	FF	00	34	D6	6B
00B0	00	34	D8	6B	FF	FF	FF	FF	FF	FF	FF	FF	01	01	0E	00
00C0	99	99	99	00	96	00	01	55	55	00	00	00	00	FF	FF	FF
00D0	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
00E0	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
00F0	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF
0100	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF	FF

提示: 当前文件数据里程数为 (The current file data mileage is): 14992 KM



9. Once the mileage is confirmed, click "Write DATA+ID", Write the original data into the Simulator.

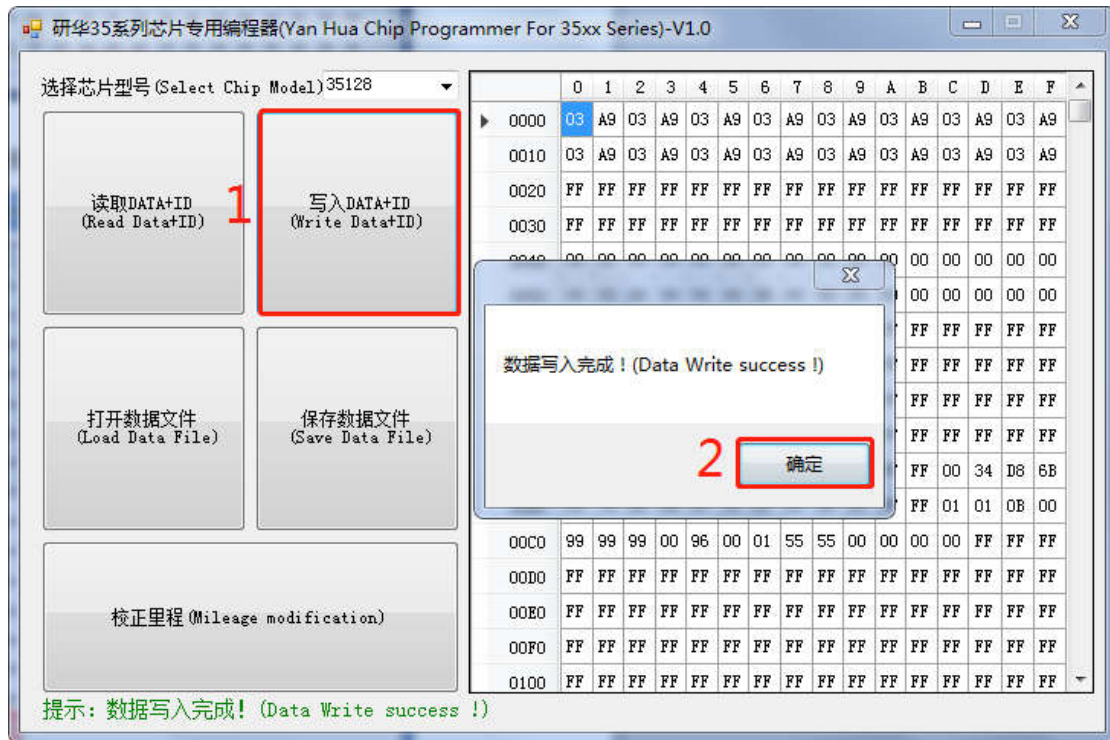

10. Click "Read Data+ID", read the data written into the Simulator, and check the mileage.

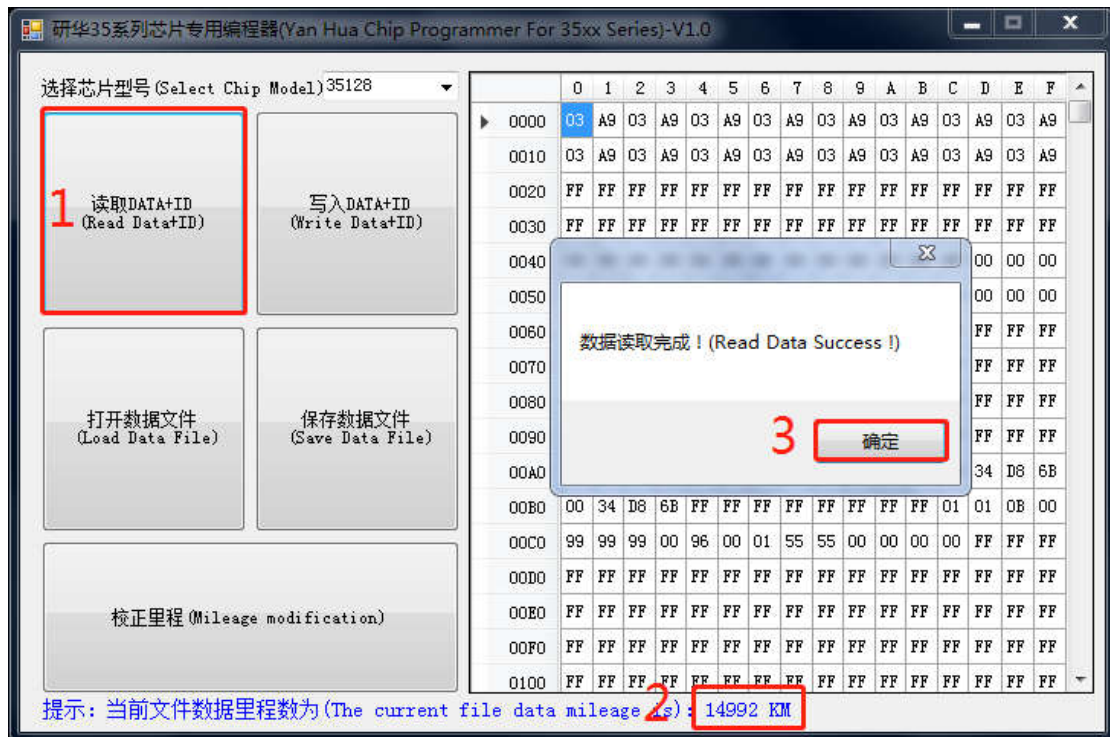

11. After the mileage is confirmed, click "Mileage modification" and input the mileage you want.

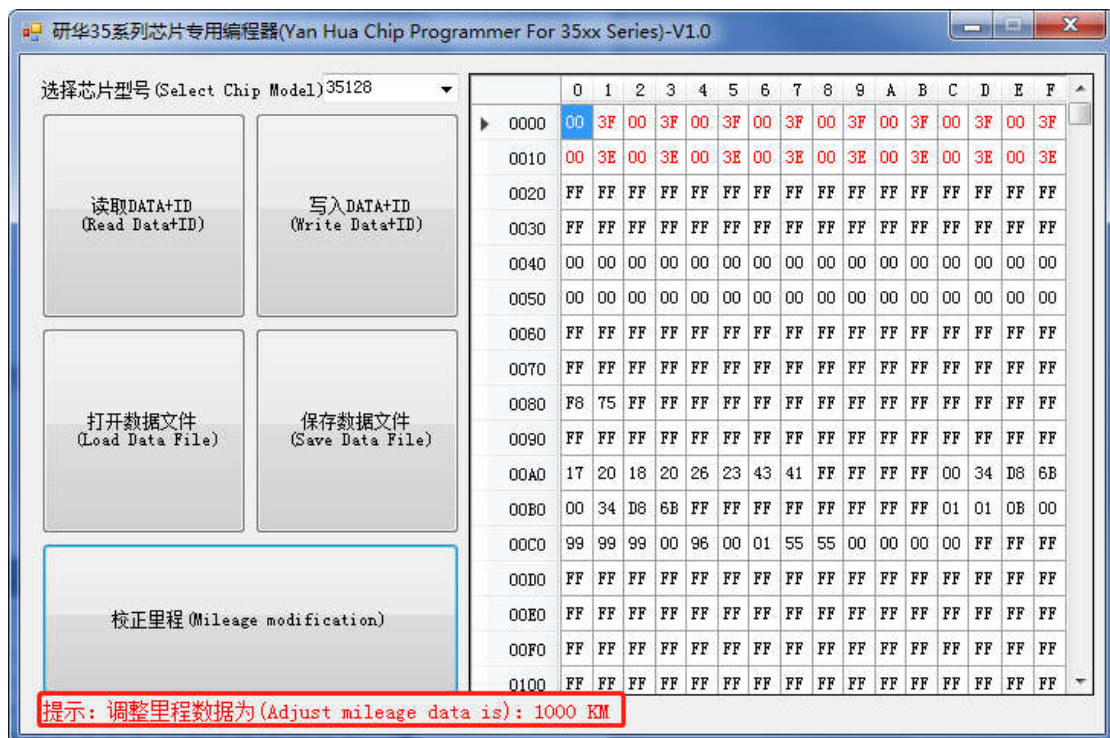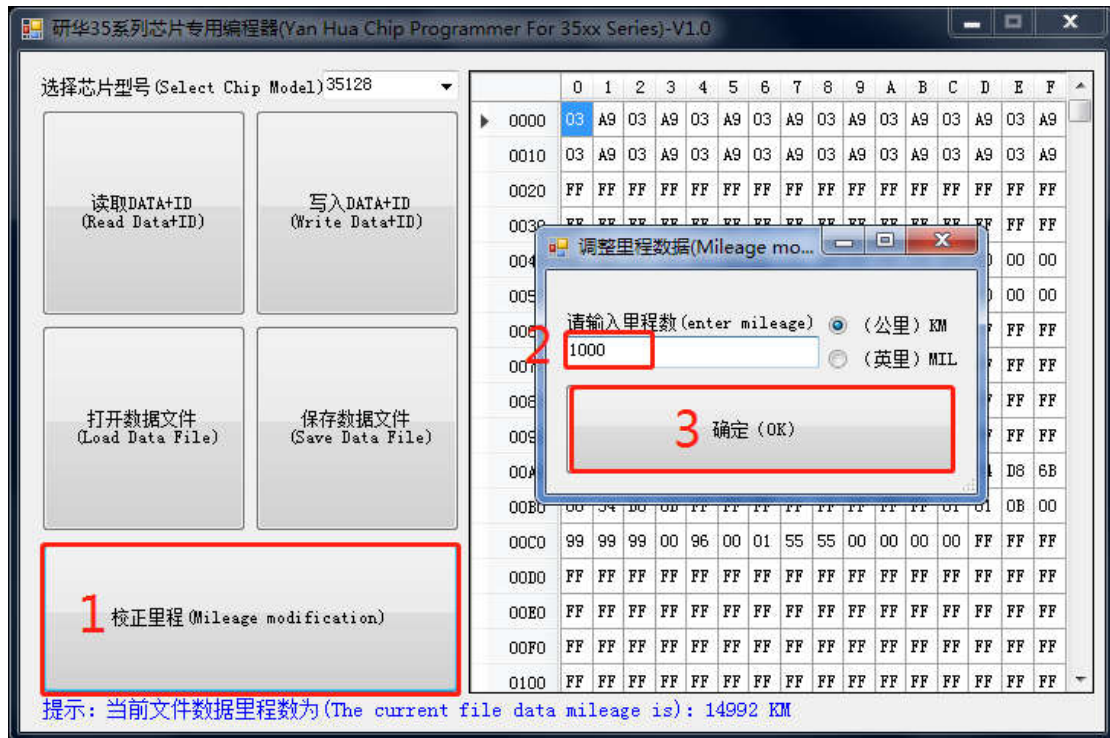

14.If the displayed mileage is the same as what you want, cut off the handle of the Simulator, and solder the Simulator to the original EEPROM position. Pay attention to the EEPROM direction. Install the odometer back to the car to verify whether the mileage modification is successful.

